


BOMBA DE ACOPLAMIENTO DIRECTO PARA TRACTOR TRPS-D-550-2X2

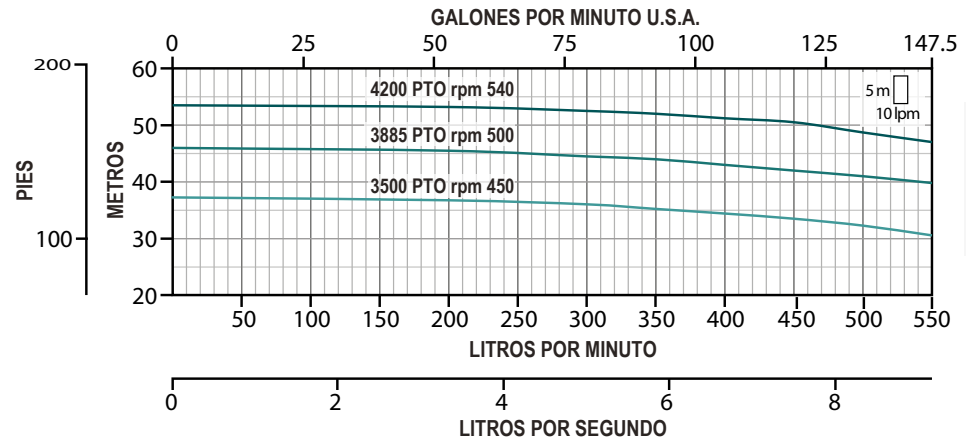



MÍNIMA POTENCIA (Hp) 	SUCCIÓN X DESCARGA	RELACIÓN DE TRANSMISIÓN	TOMA DE FUERZA PTO (rpm)	RENDIMIENTO HIDRÁULICO								
				LPM	100	200	300	350	400	450	500	550
				LPS	1.6	3.3	5	5.8	6.6	7.5	8.3	9.1
15	2" x 2"	1 : 7.77	540	CARGA (m)	53.5	53.2	52.5	52.0	51.2	50.5	48.7	47.0
10			500		46.0	45.5	44.5	44.0	43.0	42.0	41.0	39.8
7.5			450		37.2	36.7	36.0	35.2	34.4	33.5	32.3	30.6

MATERIALES DE CONSTRUCCIÓN	
Cuerpo en hierro fundido	
Impulsor cerrado de hierro fundido	
Sello mecánico en carbón/cerámica	

CARACTERÍSTICAS DE OPERACIÓN	
Máximo contenido de sólidos:	40 g/m ³
Máxima temperatura del agua:	60 °C
Máximo tiempo de funcionamiento con Q=0:	1 min
Tipo de aceite (no incluido):	SAE 80W/90 < 35°C SAE 85W/140 > 35°C

	CÓDIGO	DIMENSIONES EN mm			PESO (kg)
		A	B	C	
	TRPS-D-550-2X2	294	384	250	20
VENTA POR SEPARADO	TRPS-BCM	300	520	200	5

Conexión PTO (toma de fuerza)	
Acoplamiento unificado	
Conexión macho 1 3/8"	
DIN9611A	
6 ranuras	

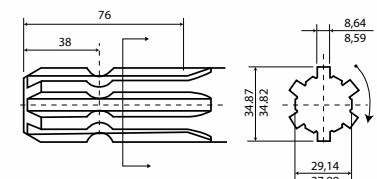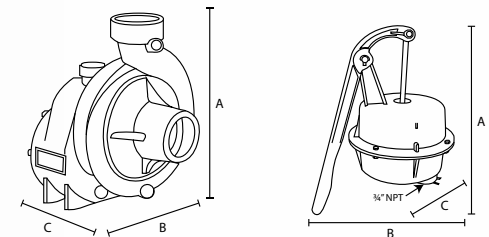

Dimensiones en mm